




Sawn Bisque Oak

Hydrocork Plus is the ultimate waterproof flooring solution, now available with an even stronger locking system, that provides an easy and fast installation. Available in a selection of wood visuals, this worry-free flooring will provide the strength and performance for high traffic commercial areas with the unmatched benefits and comfort of cork. The innovative core made of composite cork is waterproof and incredibly stable, due to the combination of 2G and PressFit systems, that provide the utmost strength. Hydrocork Plus low thickness makes it also the optimal choice for renovation projects.

WHY WOOD HYDROCORK PLUS



Waterproof
Ideal for any indoor space, including bathrooms and kitchens.



Low thickness
Only 6 mm.



Ideal for renovations
Its low thickness makes it an optimal choice for renovation projects.

Green ID



Cork based product



No trees are cut down

Amorim Cork Flooring, S.A.
Rua do Ribeirão 202 - P.O. Box 13
4536-907 S. Paio de Oleiros - Portugal
T. +351 22 747 56 00 E. info.acf@amorim.com

www.wicanders.com

WICANDERS

hydr^ocork PLUS

NEW LAUNCH



INVESTORS IN PEOPLE
We invest in people Standard

AMORIM

AMORIM CORK FLOORING

TECHNICAL DATA SHEET	STANDARD	UNIT	VALUE
Dimension (LxWxT)	-	-	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"
Mass per unit	-	Kgs / m ²	8,12
Packaging (box / pallet)	-	m ²	1,672 / 93,632
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	33

GENERAL PROPERTIES - EN 16511

Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies
Length, l	ISO 24337	≤ 1500 mm: $\Delta l \leq 0,5$ mm / > 1500 mm: $\Delta l \leq 0,3$ mm/m	Complies
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ % / convex $\leq 1,0$ %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ % / convex $\leq 0,20$ %	Complies

CLASSIFICATION PROPERTIES - EN 16511

Wear resistance IP	EN 15468, procedure B	≥ 5000 cycles	Complies
Impact resistance [mm] (big ball)	EN 13329-2006+A1:2008, Annex F	≥ 1600 mm	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Resistance to staining	EN 438-2	Groups 1 and 2; grade 5 Group 3; grade 4	Complies
Residual Indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies
Swelling	ISO 24336	≤ 18 %	Complies
Dimensional Stability (heat conditions)	ISO 23999	$\leq 0,25$ %	Complies


SAFETY PROPERTIES - EN 14041

Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	BSI-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Electrical behaviour	EN 1815	kV	Not antistatic
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable

ADDITIONAL PROPERTIES

Impact sound reduction	EN ISO 10140	dB (A Lw)	16
Walking noise	IHD-W431	dB %	Difference of loudness 12,2dB Reduction Improvement 42,0%
Thermal resistance (Thermal conductivity)	EN ISO 10456	m ² K/W	0,05

- 1 PROTECTIVE WEAR LAYER
- 2 HIGH RESOLUTION DECORATIVE
- 3 SOLID VINYL LAYER
- 4 AGGLOMERATED CORK COMPOSITE CORE
- 5 BALANCING VINYL LAYER

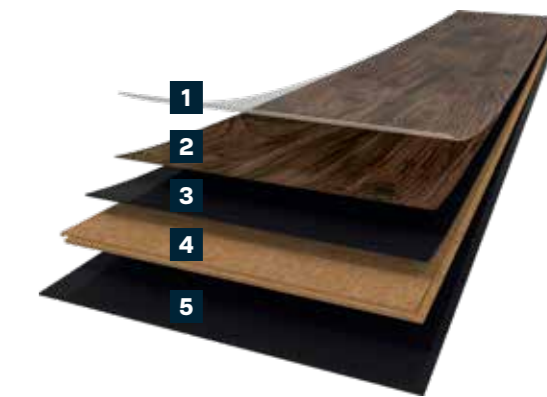

2G PRESS FIT

23 LIMITED LIFETIME WARRANTY

33 10 YEAR WARRANTY



Why hydracork PLUS

Ideal for renovations
 Its low thickness makes it an optimal choice for renovation projects.



Reduced installation costs
 It can be easily installed over other materials.



Limited Lifetime Warranty
 for residential applications.



Dimensional stability
 reinforced stability.




Durable, tough
 and easy to maintain.



Impressive realism
 a curated selection of realistic wood visuals.



Suitable for underfloor heating
 maintaining a comfortable temperature all year round.



80000642 Linen Cherry



80000665 Wheat Oak



80000661 Claw Silver Oak



80000666 Light Dawn Oak



80000636 Alaska Oak



80000618 Castle Raffia Oak



80000616 Sylvan Gold Oak



80000620 Castle Toast Oak



80000664 Sylvan Brown Oak



80000656 Limed Grey Oak



80000652 Light Beech



80000644 Sand Oak



80000627 Arcadian Soya Pine



80000630 Arcadian Rye Pine



80000638 Chalk Oak



80000668 Rustic Fawn Oak



80000634 Century Fawn Pine



80000667 Arcadian Artic Pine



80000646 Wheat Pine



80000624 Sawn Bisque Oak



80000622 Sawn Twine Oak



80000640 European Oak



80000654 Nature Oak



80000648 Elegant Oak



80000669 Rustic Grey Oak



80000632 Century Morocco Pine