

# Packaging of Calcium Silicate Boards

## Capacity

Max. 2.4 m<sup>3</sup> (85 cu.ft.)

## Protection

- 2.5 mm corrugated cardboard on and around the top layer(s).
- Between pallet and first layer of material:  
Waterproof polyethylene foam sheet.
- 2 layers of 100 μ polyethylene stretch-film cover (UV-type) with multiple-layer protection of top and bottom layers.

## Tare weight

Nominal 25 kg (55 lbs)

## HS code

6806.90.00

## Pallet

Export pallets, 104 × 125 × 15 cm and 94 × 125 × 15 cm, 4-way entry made of wood and ISPM 15 stamped and certified.

Export pallets, 207 × 126 × 15 cm and 248 × 126 × 15 cm, 2-way entry made of wood and ISPM 15 stamped and certified.

Standard size: 104 × 125 × 15 cm, (94 × 125 × 15 cm)

## Standard pallet sizes


104 × 125 × 15 cm, (94 × 125 × 15 cm),  
(207 × 126 × 15 cm), (248 × 126 × 15 cm)

## Loading capacity

| Pallet size             | 104 × 125 cm | 94 × 125 cm | 207 × 126 cm | 248 × 126 cm |
|-------------------------|--------------|-------------|--------------|--------------|
| 20 foot DC container    | 10 pallets   | 10 pallets  | 8 pallets    | NA           |
| 40 foot DC/HC container | 20 pallets   | 22 pallets  | 18 pallets   | NA           |
| 13.6 m lorry            | 23 pallets   | 24 pallets  | 20 pallets   | 18 pallets   |



Packing of standard boards

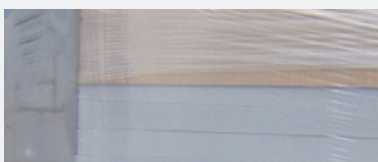

Detail: Top of pallet with cardboard and polyethylene cover