



Tiles & planks
Senso Collection

Floor for the home
2024 Collection

Gerflor®



Table of contents

- 04. Gerlor Group
- 10. Gerflor decoration trends 2024
- 14. Make the right choice
- 14. Senso range
- 16. LVT interlocking**
 - 16. Senso Premium Clic
 - 28. Senso Clic
 - 36. Senso 20 Lock
- 42. LVT looselay**
 - 42. Senso Easy Premium
- 48. LVT self adhesive**
 - 48. Senso SA Premium
 - 54. Senso self-adhesive
 - 64. Vinyl tiles
- 67. Cleaning - numerical index**
- Communication tools**
 - 67. Cleaning instructions
 - 68. Numerical index
 - 69. Communication tools

Find out more on
gerflor.com

Find us on
social media:



Gerflor Group

continually moving forward

To create, manufacture & market innovative, design-led & eco-responsible solutions for flooring, walls & their finishes.



To anticipate the specific needs of the users, specifiers, installers & distributors around the world.

To provide competitiveness & success for all our customers.

International Presence



& Proximity To Our Customers Through:

- ✓ 30 subsidiaries & a broad network of distributor partners.
- ✓ 19 production plants & logistic hubs.
- ✓ STAFF: 4 200 employees, 40 nationalities.

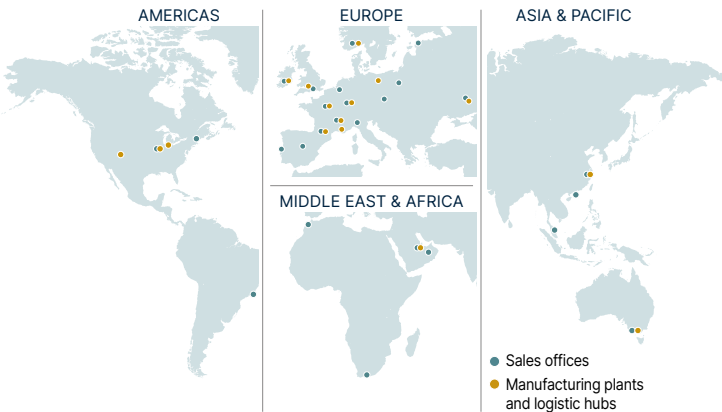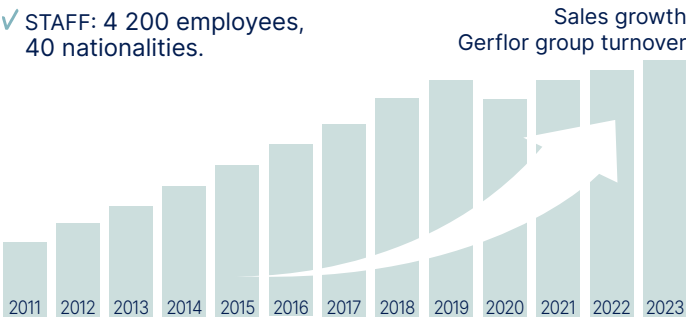

Industrial Expertise

in several fields

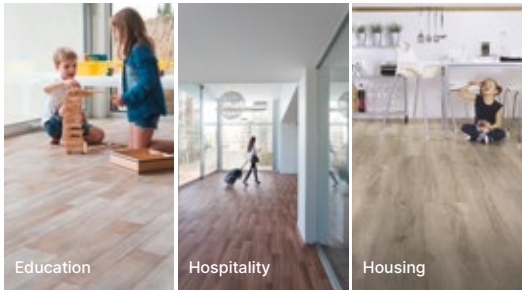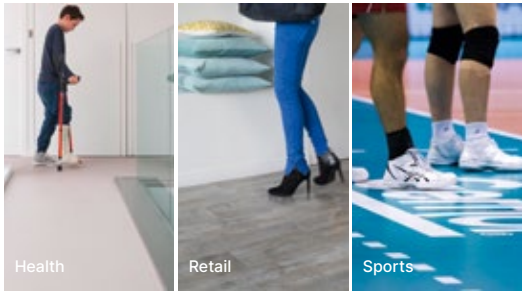

Design

trendy & creativity

- ✓ Our in-house Creation Studio brings product design originality & freshness.
- ✓ Our innovative ideas perfectly fit both market needs & creative expectations of interior designers, housing specifiers & architects.
- ✓ Our moto, be different
70% of sales are achieved with product ranges less than three years old.

Decorator

- ✓ Every year, Gerflor renews its collections and reates new designs
- ✓ Designs solutions that can be combined and mixed to create custom spaces



Innovative Solution

- GERFLOR SPIRIT
- ✓ 3 Research & Development centers dedicated to product innovation.
 - ✓ 144 engineers for ultimate flooring solutions that anticipate the needs of our customers.
 - ✓ Partnerships with laboratories and universities around the world enable Gerflor to benefit from the last materials & emerging technologies.
- Innovation distinguishes between a leader and a follower.

Gerflor Group

continually moving forward

Expert


quality & choice



- ✓ Extensive product range
- ✓ Top-quality products designed for high traffic
- ✓ Highly resistant
- ✓ Solutions for all customer needs: Installation type, size, all-uses, related accessories

Clever

quick & easy

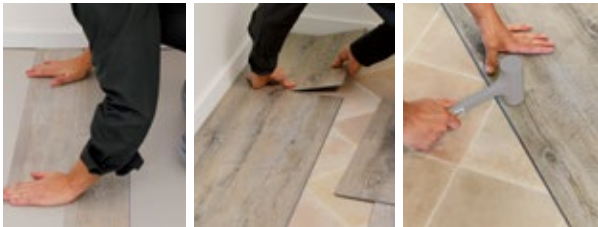

- ✓ Make life easier
- ✓ Products installed without glue and without subfloor preparation
- ✓ Optimal user-friendliness
- ✓ Can be installed with a utility knife



Inventor innovation for the home

1985



Self-Adhesive Tiles
A revolutionary Peel'n Stick product: fast and easy to lay

2006



Senso
Self adhesive planks with an ultra realistic look

2010



Interlocking
Interlocking vinyl tiles and planks

2014



Adjust
The easiest solution. No clic, no glue

2018



Senso Clic Premium
Simply the best for your floor

2020



Senso Premium Easy
Looselay solution: no clic no glue. Mix and match design: 12 designs to associate.

2022



Senso Premium Clic New Generation
Fold down patented Gerflor

2023



Senso Clic New Generation
Fold down patented Gerflor

2023




Senso Premium Clic New Generation
EIR embossing (registration)
Tiles XL Format

Gerflor Group


continually moving forward

Market


informations & orientations in Western Europe

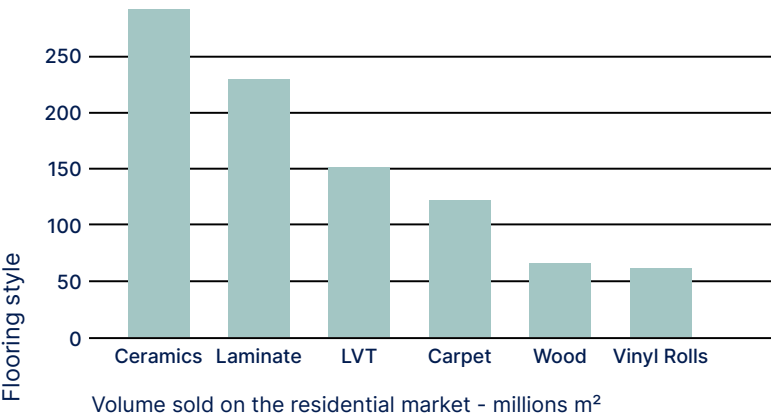

Type

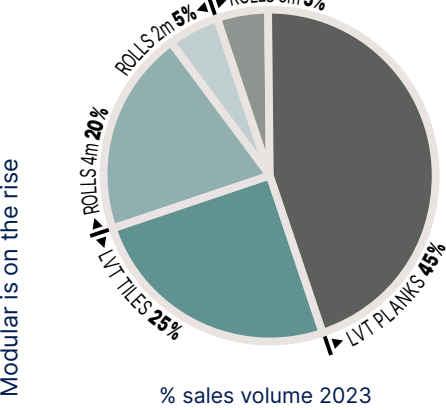

Design

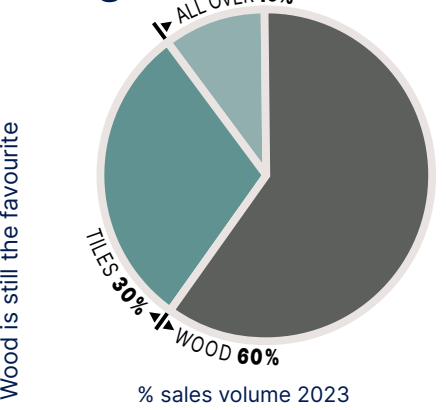

A solution eco-responsible

Committed to sustainable development

Going Further



Raw materials

- Healthy raw materials**
No heavy metals, no solvents, no formaldehyde
- Sustainable products**
recycled content integration



Indoor air quality

- Low VOC emissions**
- All our products conform to **Floorscore, AgBB, A+ (France) and M1 (Finlande)** standards.
- TVOC emissions after 28 days **< 100 µg/m³**.
- Gerflor looselay solutions (GFT rolls, tiles and snap-together planks): no glue required.



VOC Free system



Environmental footprint

- All our products are **eco-designed** based on a life-cycle analysis model in order to **reduce their environmental impact**.
- Our products are regularly assessed in accordance with **ISO 16000 standards**.



Recycling

Second Life is a Gerflor's innovative program for collecting installation waste and non-glued end-of-life products. In partnership with our installers, this program is now fully effective in France and Germany and in the process of being implemented in Italy, Benelux and Scandinavia.

All of our Clic products contain up to 55% recycled materials (production falls, laying falls, end of life).



WATER CONSUMPTION SINCE 1998

Did you know?
All inks used in the group's factories are solvent-free and water-based. The printing cylinders are cleaned with biodegradable agents and the wastewater inks are recycled by evaporation.


Looselay products / No glue VOC free system



Gerflor Decoration trends



Japandi

Simplicity, Purity, Handmade weaving
Meticulous details, Lightness,
Natural Materials, Bold

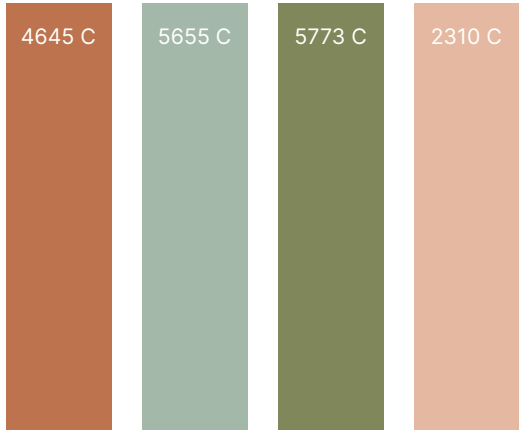

Terra Luna


Roundness, Oversized, Raw Materials,
Space, Primitive Shapes, Wild

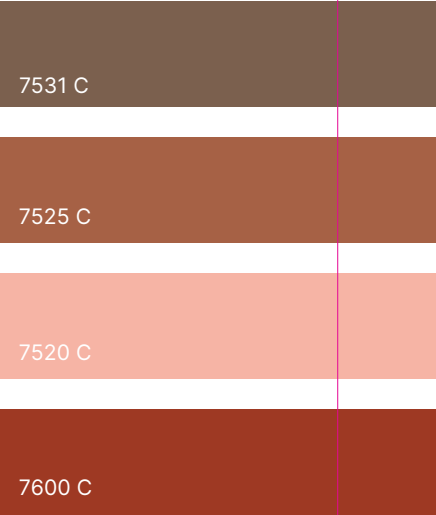

Gerflor Decoration trends

Classic Clash

Marble's Triumph, Stone Mix, Macro Terrazzo, Timeless Beauty, Retro, Richness



Transparency

Tie and Dye, Light, Plexiglass, Fluid, Liquid, Mother Pearl



680 C

5473 C

338 C

1215 C



LVT solutions

Gerflor 2024


Make the right choice!

	Interlocking			Looselay	Self Adhesive	
	SENSO PREMIUM CLIC	SENSO CLIC	SENSO 20 LOCK	SENSO EASY PREMIUM	SENSO SELF-ADHESIVE PREMIUM	SENSO SELF-ADHESIVE
Laying system	Looselay			Looselay	Fully adhered	
Main benefits	• New clic system: vertical small side and horizontal large side • Quick and easy		• Rigid structure: better stability • Easy removable	• The easiest laying solution • No messy residue	• Easy and quick installation	
Price	€ € €	€ €	€	€ € €	€	€
Tools needed	Ruler + utility knife + rubber mallet	Ruler + utility knife + rubber mallet	Ruler + utility knife	Ruler + utility knife	Ruler + utility knife	Ruler + utility knife
Thickness (mm)	4.5	4.2	3.4	4	2.5	2
Wear layer thickness (mm)	0.55	0.3	0.2	0.55	0.3	0.2
European classification	23 / 33	23 / 31	22	33 / 42	23/31	22
Traffic resistance	+++	++	+	+++	++	+
Fire rating	B _f 1S1	B _f 1S1	B _f 1S1	B _f 1S1	B _f 1S1	B _f 1S1
Sound insulation (dB)	4	4	3	4	5	3
Room impact noise	Class C	Class C	-	Class B	Class C	Class C
Compatible with wet rooms	OK	OK	OK	OK	OK	OK
Domestic use guarantee*	20 years	12 years	10 years	15 years	12 years	10 years
	Page 16	Page 28	Page 36	Page 42	Page 48	Page 54

* For more details on guarantee, see www.gerflor.com



Senso Range

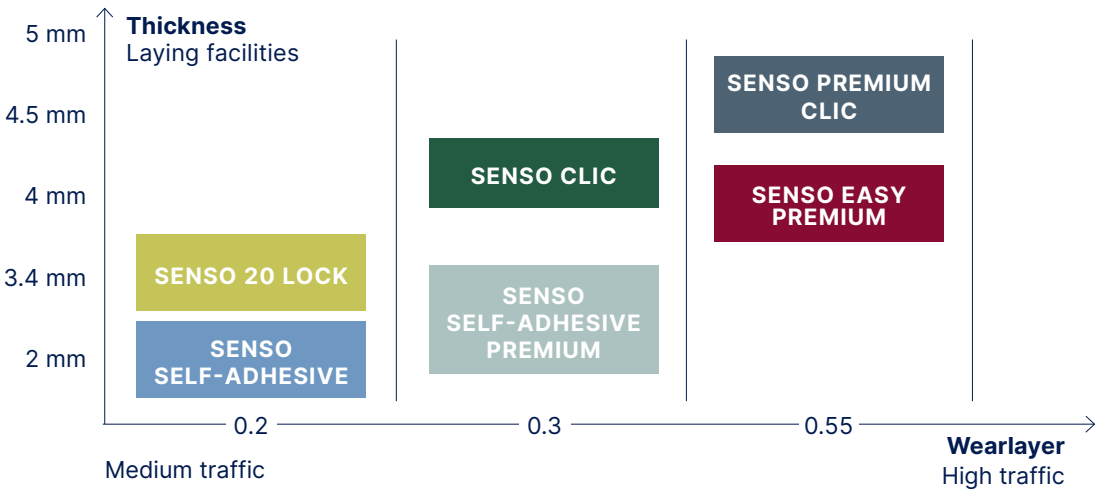

Product Benefits

+ Design references

Style organised collection
Quality of designs and embossing
Textured surface

All uses

Watertight
10 years minimum warranty:
total finish (planks + grout)


Makes life easier

Easy to transport:
Easy to install:
Easy to cut:
Easy to clean:

modular format
adhesive or interlocking
utility knife
soapy water

Eco-friendly

TVOC < 100 µg/m³
100% recyclable
Lead-free
Formaldehyde-free
Solvent-free
Soapy water cleaning



3 Installation technologies

Interlocking
Looselay
Self-Adhesive

SENSO PREMIUM CLIC

DUOCORE Rigid
& Comfort



Easy to install and cut
in hard-to-reach areas



Direct laying on ceramic
Max 5mm / 2mm



Bay window installation
Max 60°



Scratch resistant



Traffic resistant



Suitable for wet rooms



Realistic designs




XL format
Planks (146.1 × 24 cm)
Tiles (49 × 98 cm)
EIR : Emboss In Register



Guarantee 20 years
Domestic use




**Combine with Gerflor
Silence Plus 19dB**
Code: 59490001 / Pack: 10m²



**MADE IN
FRANCE**



Scan and
discover
**INTERIOR
DESIGNER**





1-Pecan
Size: 123.9 × 21.2 cm
Code: 6053 0511 - EAN: 3475710551727

2-Sunny White
Size: 123.9 × 21.2 cm
Code: 6053 0286 - EAN: 3475710551741

3-Kola
Size: 123.9 × 21.2 cm
Code: 6053 0309 - EAN: 3475710551734

4-Meadow Light Greige
Size: 123.9 × 21.2 cm
Code: 6053 1505 - EAN: 3475710624414

5-Meadow Taupe
Size: 123.9 × 21.2 cm
Code: 6053 1506 - EAN: 3475710624421

6-Meadow Spring Honey
Size: 123.9 × 21.2 cm
Code: 6053 1507 - EAN: 3475710624438



EIR embossing



0286 - Sunny White



1505 - Meadow Light Greige



EIR embossing



0953 - Columbia Taupe

- 1-Columbia**
Size: 123.9 x 21.2 cm
Code: 6053 0837 - EAN: 3475710551765
- 2-Columbia Taupe**
Size: 123.9 x 21.2 cm
Code: 6053 0953 - EAN: 3475710551772
- 3-Authentic Nature**
Size: 123.9 x 21.2 cm
Code: 6053 0828 - EAN: 3475710551789
- 4-Noce Taupe**
Size: 123.9 x 21.2 cm
Code: 6053 1504 - EAN: 3475710624407
- 5-Noce Brown**
Size: 123.9 x 21.2 cm
Code: 6053 1503 - EAN: 3475710624391
- 6-Cleveland Dark**
Size: 123.9 x 21.2 cm
Code: 6053 0728 - EAN: 3475710551796







1-Fjord Light Oak
Size: 146,1 × 24 cm
Code: 6052 1509 - EAN: 3475710624384

2-Fjord Oak Golden
Size: 146,1 × 24 cm
Code: 6052 1508 - EAN: 3475710624377

XL Format




**New tiles
XL format**

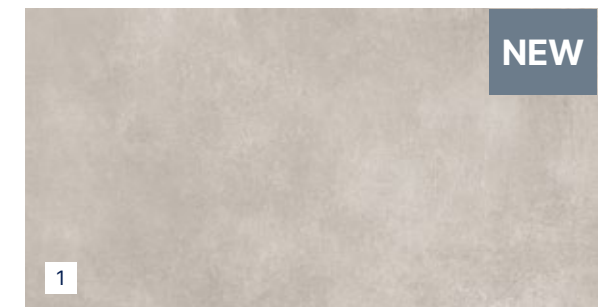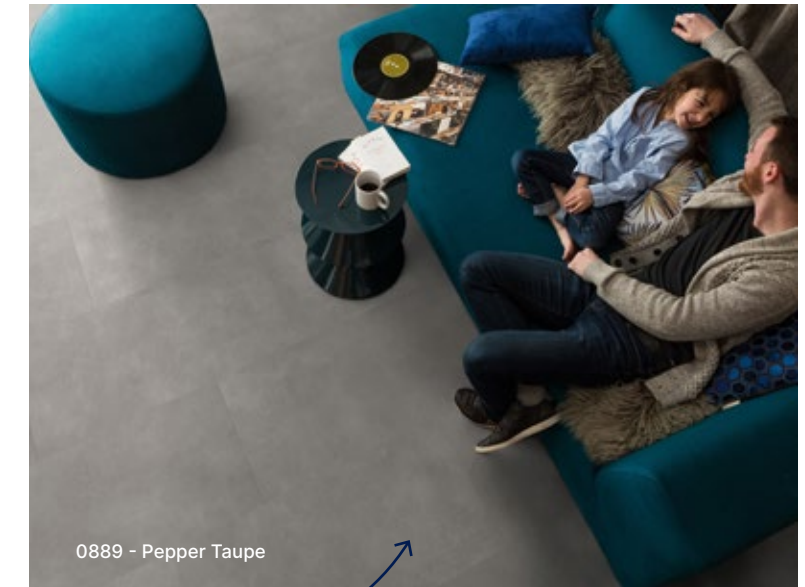

1-Pepper Light
Size: 49 × 98 cm
Code: 6115 0890 - EAN: 3475710624643

2-Pepper Taupe
Size: 49 × 98 cm
Code: 6115 0889 - EAN: 3475710624650



XL Format



1516 - Neo Marble



NEW

1-Neo Marble
Size: 49 x 98 cm
Code: 6115 1516 - EAN: 3475710624667

XL Format




1



NEW

1-Chaliki Natural
Size: 49 x 98 cm
Code: 6115 1517 - EAN: 3475710624674
2-Chaliki Verde
Size: 49 x 98 cm
Code: 6115 1518 - EAN: 3475710624698

XL Format



NEW

2



1517 - Chaliki Natural

Technical Characteristics

Description					
Total thickness	EN ISO 24346	mm	4.5		
Thickness of wearlayer	EN ISO 24340	mm	0.55		
Weight: mass per unit area	EN ISO 23997	g/sqm	7100		
Size	EN ISO 24342	cm	planks: 21.2 × 123.9	planks: 24 × 146.1	tiles: 49 × 98
Number of planks / tiles and sqm per box	-	planks / tiles	8 planks / 2.10 sqm	7 planks / 2.45 sqm	5 tiles / 2.40 sqm
Classification					
Norm / Product specification	-	-	EN ISO 10582		
European classification	EN ISO 10874	class	23 / 33		
Fire rating - Classification	EN 13501-1	class	Bfl-s1		
Static electrical propensity	EN 1815	kV	< 2		
Performance					
Wear resistance	EN 660.2	mm ³	< 2.0		
Wear group	-	group	T		
Type binder content	ISO 10582	type	I		
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.15		
Dimensional stability (average measured value)	-	%	0.05		
Residual indentation	EN ISO 24343-1	mm	≤ 0.10		
Sound insulation	EN ISO 717-2	dB	4		
Room impact noise	NF S 31074	dB	79		
Castor chair test	ISO 4918	-	OK		
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25		
Colour fastness	EN 105 - B02	degree	≥ 6		
Surface treatment	-	-	Pureclean+®		
Chemical products resistance	EN ISO 26987	class	OK		
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10		
Ce Marking					
	EN 14041	   			

Areas of use: domestic use

Composition 100 % REACH
Phthalate free (except recycled content)

REACH

MADE IN FRANCE

AF AQ
ISO 9001
VERSION 2008
ISO 14001

HEALTH

- TVOC < 10 µg/m³
after 28 days
- Formaldehyde-free
 - Lead-free, no heavy metals
 - Solvent-free
 - No harmful plasticizer
 - Low VOC emission
 - No glue

ENVIRONMENT


- ISO 14001
- Soapy water cleaning




Scan and discover
The complete range

Laying


1 important

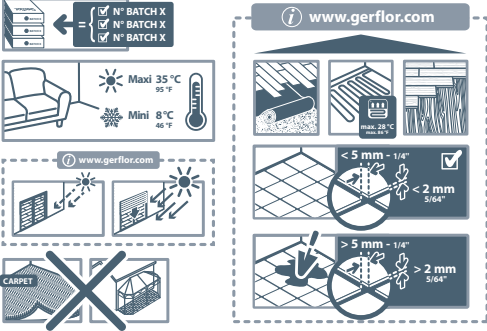


2 preparation

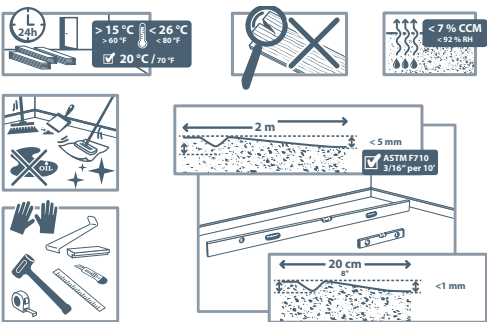

3 installation

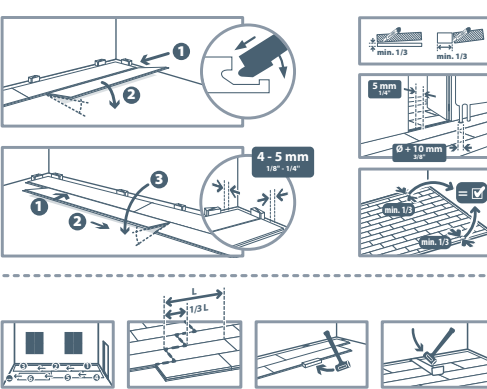

4 maintenance

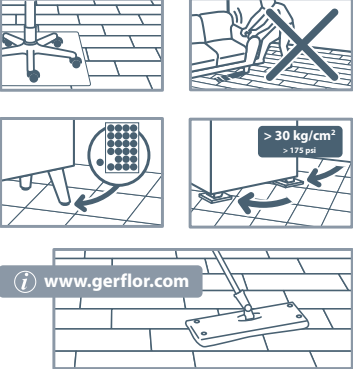

SENSO PREMIUM CLIC

10% RECYCLED CONTENT 100% RECYCLABLE

Gerflor



Scan and discover
INTERIOR
DESIGNER



SENSO CLIC

 **Rigid
& Comfort**

 **Fast
& Easy**



Direct laying on ceramic
Max 5mm / 2mm



Bay window installation
Max 60°



Traffic resistant



Suitable for wet rooms



Easy cleaning



Guarantee 12 years
Domestic use



**Combine with Gerflor
Silence Plus 19dB**
Code: 59490001 / Pack: 10m²



**MADE IN
FRANCE**



- 1-Pecan**
Size: 123.9 x 21.2 cm
Code: 6097 0511 - EAN: 3475710569371
- 2-Columbia Pearl**
Size: 123.9 x 21.2 cm
Code: 6097 0954 - EAN: 3475710599972
- 3-Pecan Nature**
Size: 123.9 x 21.2 cm
Code: 6097 0950 - EAN: 3475710599965
- 4-Simba Nature**
Size: 123.9 x 21.2 cm
Code: 6097 1028 - EAN: 3475710599989
- 5-Pecan Light**
Size: 123.9 x 21.2 cm
Code: 6097 1300 - EAN: 3475710600036



- 1-Lord Honey**
Size: 123.9 x 21.2 cm
Code: 6097 0955 - EAN: 3475710569388
- 2-Scandinav Honey**
Size: 123.9 x 21.2 cm
Code: 6097 1513 - EAN: 3475710624506
- 3-Scandinav Light**
Size: 123.9 x 21.2 cm
Code: 6097 1515 - EAN: 3475710624520
- 4-Scandinav Medium**
Size: 123.9 x 21.2 cm
Code: 6097 1512 - EAN: 3475710624490
- 5-Scandinav Dark**
Size: 123.9 x 21.2 cm
Code: 6097 1514 - EAN: 3475710624513





NEW

1




NEW

2



NEW

3

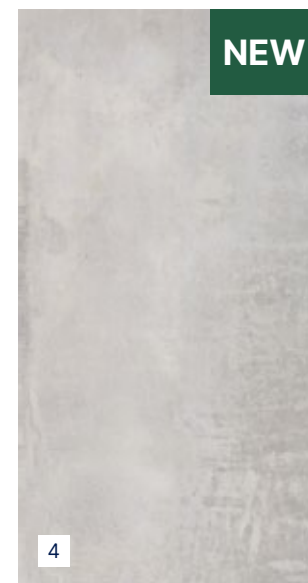


NEW

4



5

- 1-Travertin Ivory**
Size: 72.9 x 38.9 cm
Code: 6098 1511 - EAN: 3475710624483
- 2-Pietra Beige**
Size: 72.9 x 38.9 cm
Code: 6098 1510 - EAN: 3475710624469
- 3-Shale Black**
Size: 72.9 x 38.9 cm
Code: 6098 1297 - EAN: 3475710624636
- 4-Gotha Clear**
Size: 72.9 x 38.9 cm
Code: 6098 0938 - EAN: 3475710624445
- 5-Pepper Taupe**
Size: 72.9 x 38.9 cm
Code: 6098 0889 - EAN: 3475710600173



1511 - Travertin Ivory



SENSO 20 LOCK

Click...
It's Done!



Quick & easy installation

No glue / Can be trimmed with
an utility knife



Resistant

Shock-resistant varnish



Rigid structure



Suitable for wet rooms

Watertight and slip-resistant



Guarantee 10 years

Domestic use



1-Brickell Dark

Size: 60.2 x 29.8 cm
Code: 3667 1119 - EAN: 3475710445477

2-Tuscan

Size: 60.2 x 29.8 cm
Code: 3667 1090 - EAN: 3475710445422

3-Brickell Grey

Size: 60.2 x 29.8 cm
Code: 3667 1099 - EAN: 3475710445460

4-Dew Beige

Size: 121 x 17.7 cm
Code: 3668 1091 - EAN: 3475710445439

5-Lumber Taupe

Size: 121 x 17.7 cm
Code: 3668 1095 - EAN: 3475710445521

6-Lumber Fauve




Size: 121 x 17.7 cm
Code: 3668 1096 - EAN: 3475710445538

7-Lumber Grey

Size: 121 x 17.7 cm
Code: 3668 1097 - EAN: 3475710445545

8-Cashew Clear

Size: 121 x 17.7 cm
Code: 3668 1093 - EAN: 3475710445507

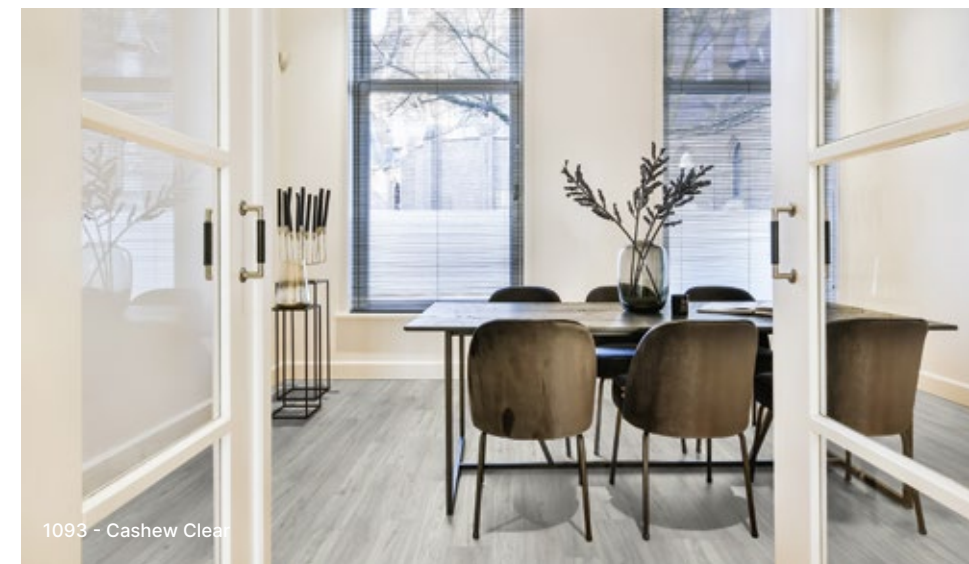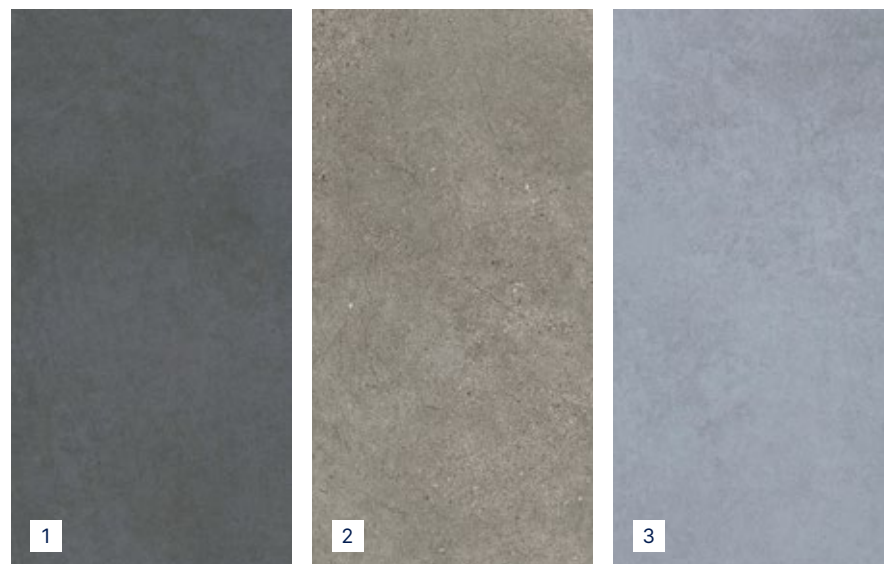

Technical Characteristics

Description				
Total thickness	EN ISO 24346	mm	3.40	
Thickness of wearlayer	EN ISO 24340	mm	0.20	
Weight	EN ISO 23997	g/sqm	6360	
Size	EN ISO 24342	cm	planks: 17.7 × 121	tiles: 29.8 × 60.2
Number of planks / tiles and sqm per box	-	planks /tiles	9 planks / 1.93 sqm	11 tiles / 1.97 sqm
Classification				
Norm / Product specification	-	-	EN ISO 10582	
European classification	EN ISO 10874	class	22	
Fire rating - Classification	EN 13501-1	class	B _{fl} -s1	
Static electrical propensity	EN 1815	kV	< 2	
Performance				
Wear group	-	group	T	
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	3	
Room impact noise	NF S 31074	dB	78	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Chemical products resistance	EN ISO 26987	class	OK	
Surface treatment	-	-	PUR+	
Guarantee for residential use	-	year	10	
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	
CE Marking				
CE	EN 14041	-		

Areas of use: domestic use



HEALTH



TVOC < 100 µg/m³
after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- No glue

ENVIRONMENT

- ISO 14001
- Soapy water cleaning



Scan and discover
The complete range




Laying

1 important







www.gerflor.com




2 preparation

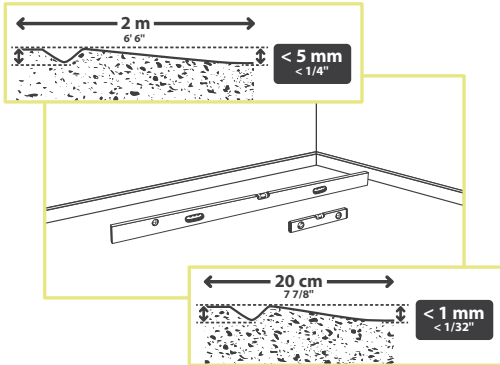

3 installation

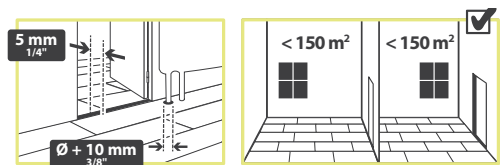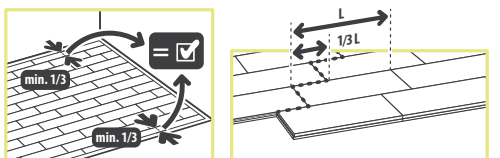

4 maintenance

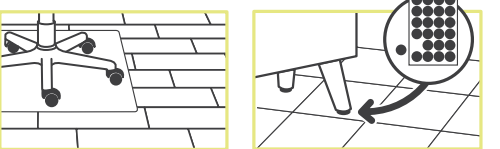

Cleaning - see page 67

See index page 68



SENSO EASY

PREMIUM

Looselay
no clic no glue

LVT Tiles
Looselay



Reinforced structure



Direct laying on ceramic



Leaves the subfloor intact



Easy mix and match



No dilatation




Suitable for wet rooms



Guarantee 15 years
Domestic use



Scan and
discover
**INTERIOR
DESIGNER**






- 1-Simba Grey**
Size: 121.9 × 18.4 cm
Code: 3617 0888 - EAN: 3475710439476
- 2-Hella White**
Size: 121.9 × 18.4 cm
Code: 3617 0035 - EAN: 3475710438035
- 3-Rosebud Pearl**
Size: 121.9 × 18.4 cm
Code: 3617 0506 - EAN: 3475710438004
- 4-Lord Light**
Size: 121.9 × 18.4 cm
Code: 3617 1027 - EAN: 3475710438042
- 5-Puzzle**
Size: 121.9 × 18.4 cm
Code: 3617 0385 - EAN: 3475710438011



0938 Gotha Clear / 0888 - Simba Grey

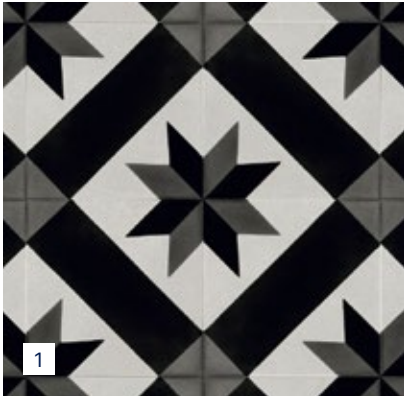

1



2





3



4

- 1-Cordoba Black**
Size: 61 × 61 cm
Code: 3618 1034 - EAN: 3475710438271
- 2-Cordoba Ivory**
Size: 61 × 61 cm
Code: 3618 1033 - EAN: 3475710438264
- 3-Provence Blue**
Size: 61 × 61 cm
Code: 3618 0917 - EAN: 3475710438240
- 4-Provence Ivory**
Size: 61 × 61 cm
Code: 3618 1032 - EAN: 3475710438257

- 5-Flagstone Dark**
Size: 61 × 30.5 cm
Code: 3616 0780 - EAN: 3475710439421
- 6-Wallstreet Light**
Size: 61 × 30.5 cm
Code: 3616 0702 - EAN: 3475710439438
- 7-Gotha Clear**
Size: 61 × 30.5 cm
Code: 3616 0938 - EAN: 3475710439414

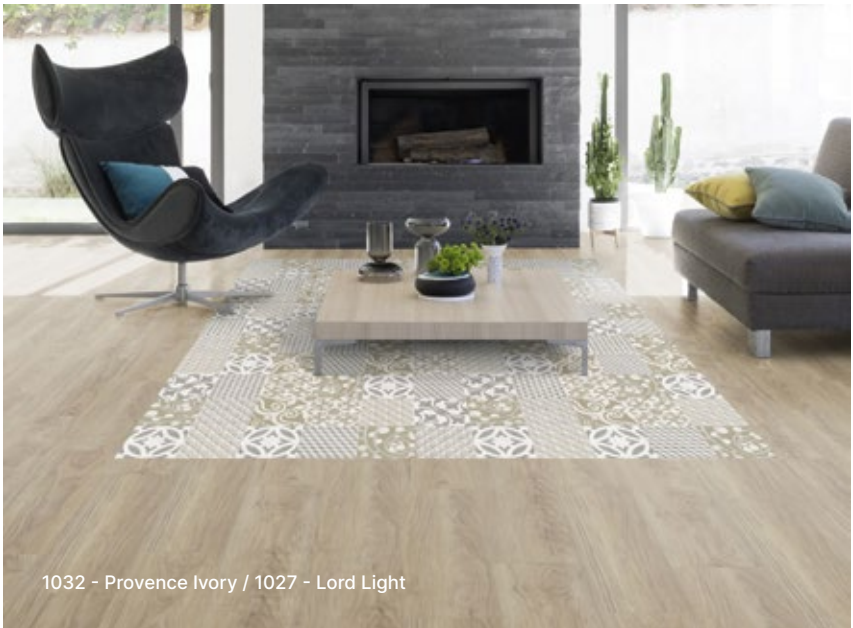

1032 - Provence Ivory / 1027 - Lord Light




5



6



7



Technical Characteristics

Description					
Total thickness	EN ISO 24346	mm	4.0		
Thickness of wearlayer	EN ISO 24340	mm	0.55		
Weight: Mass per unit area	EN ISO 23997	g/sqm	7200		
Size	EN ISO 24342	cm	planks: 18.4 × 121.9	tiles: 30.5 × 61	tiles: 61 × 61
Number of planks / tiles and sqm per box	-	planks / tiles	8 planks / 1.79 sqm	10 tiles / 1.86 sqm	4 tiles / 1.49 sqm
Classification					
Norm / Product specification	-	-	EN ISO 10582		
European classification	EN ISO 10874	class	23-33		
Fire rating - Classification	EN 13501-1	class	B _{f1} -s1		
Static electrical propensity	EN 1815	kV	< 2		
Slip resistance wet: ramp test with oil	DIN 51130	class	R9		
Performance					
Wear group	EN 649	group	T		
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15		
Residual indentation	EN ISO 24343-1	mm	≤ 0.10		
Sound insulation	EN ISO 717-2	dB	4		
Room impact noise	NF S 31074	dB	75		
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25		
Colour fastness	EN 20 105 - B02	degree	≥ 6		
Surface treatment	-	-	PUR+ Matt		
Guarantee for residential use	-	year	15		
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000-6	µg/m³	< 100		
CE MARKING					
	EN 14041	-	  		

Areas of use: domestic use



HEALTH



- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission
- No glue

ENVIRONMENT



- ISO 14001
- Soapy water cleaning




Scan and discover
The complete range

Laying

1 important

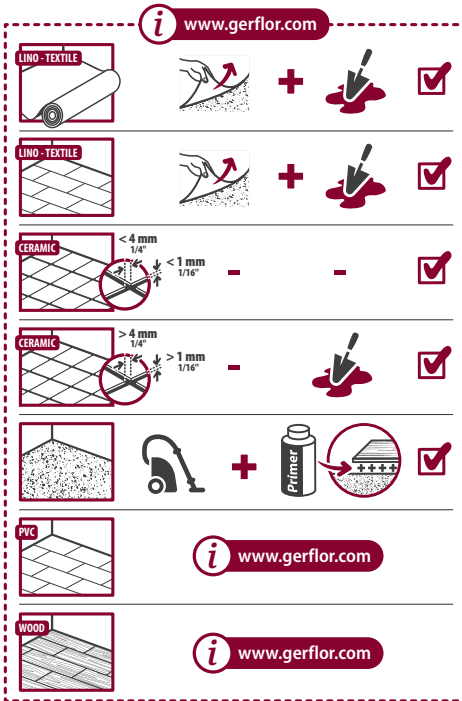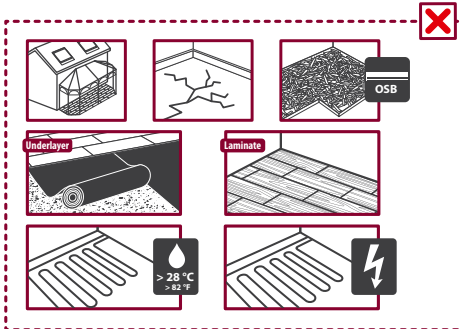


2 preparation

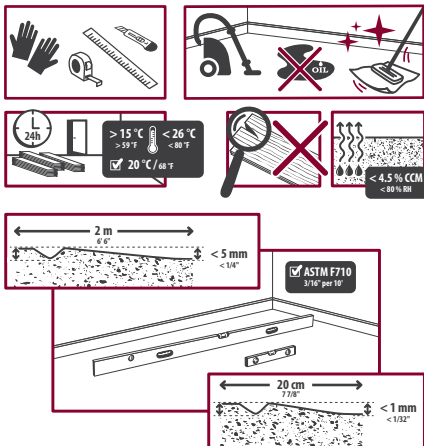


Cleaning - see page 67

3 installation

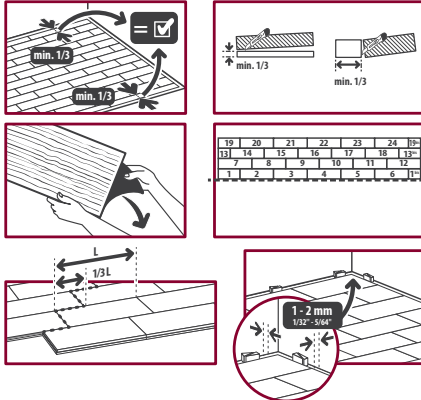

4 maintenance

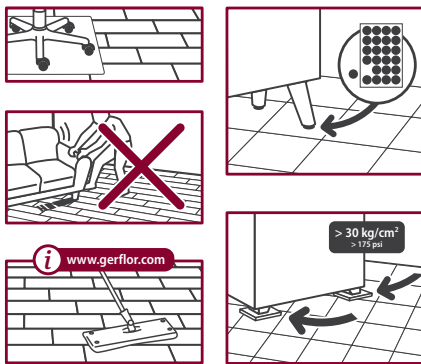



SENSO SELF-ADHESIVE

PREMIUM

**Simply the best
for your floor**

Ultra steady - Ultra resistant
Ultra easy



Reinforced structure



No gap



Reinforced adhesive



Traffic resistant



No dilatation



Easy cleaning



Guarantee 12 years
Domestic use



Scan and
discover
INTERIOR
DESIGNER







EIR embossing



Registered cutting

Registered cutting

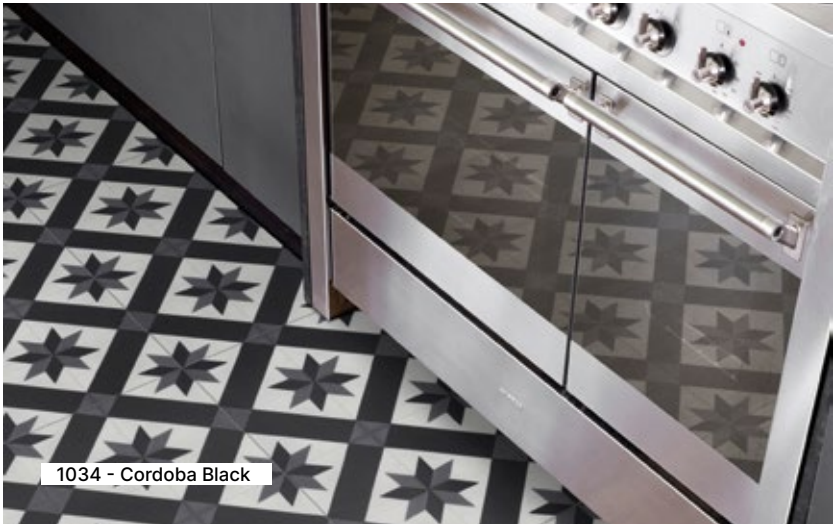

- 1-Balade Honey**
Size: 121.9 × 18.4 cm
Code: 3579 0909 - EAN: 3475710431401
- 2-Balade Grey**
Size: 121.9 × 18.4 cm
Code: 3579 0910 - EAN: 3475710431418
- 3-Balade Light**
Size: 121.9 × 18.4 cm
Code: 3579 0912 - EAN: 3475710431425
- 4-Alta Skin**
Size: 121.9 × 18.4 cm
Code: 3579 1303 - EAN: 3475710555282
- 5-Alta Clear**
Size: 121.9 × 18.4 cm
Code: 3579 1302 - EAN: 3475710555275
- 6-Simba**
Size: 121.9 × 18.4 cm
Code: 3579 0287 - EAN: 3475710428913
- 7-Pepper Light**
Size: 61 × 61 cm
Code: 3578 0890 - EAN: 3475710428876
- 8-Pepper Taupe**
Size: 61 × 61 cm
Code: 3578 0889 - EAN: 3475710428869
- 9-Provence Gold**
Size: 61 × 61 cm
Code: 3578 0920 - EAN: 3475710431463
- 10-Provence Grey**
Size: 61 × 61 cm
Code: 3578 0919 - EAN: 3475710431456
- 11-Cordoba Black**
Size: 61 × 61 cm
Code: 3578 1034 - EAN: 3475710551543
- 12-Cordoba Ivory**
Size: 61 × 61 cm
Code: 3578 1033 - EAN: 3475710551536

Technical Characteristics

Description				
Total thickness	EN ISO 24346	mm	2.50	
Thickness of wearlayer	EN ISO 24340	mm	0.30	
Weight: mass per unit area	EN ISO 23997	g/sqm	4660	
Size	EN ISO 24342	cm	planks: 121.9 × 18.4	tiles: 61 × 61
Number of planks / tiles and sqm per box	EN ISO 24342	planks / tiles	11 planks / 2.47 sqm	7 tiles / 2.60 sqm
Classification				
Norm / Product specification	-	-	EN ISO 10582	
European classification	EN ISO 10874	class	23/31	
Fire rating - Classification	EN 13501-1	class	B _{fl} -s1	
Static electrical propensity	EN 1815	kV	< 2	
Performance				
Wear resistance	EN 660.2	mm ³	< 2.0	
Wear group	EN 649	group	T	
Type binder content	ISO 10582	type	I	
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.10	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	5	
Room impact noise	NF S 31074	dB	77	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Surface treatment	-	-	PUR+	
Guarantee for residential use	-	year	12	
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100	
CE Marking				
	EN 14041	-		

Areas of use: domestic use



Composition
100 % REACH
Phthalate free



HEALTH



TVOC < 100 µg/m³
after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT


- ISO 14001
- Soapy water cleaning




Scan and discover
The complete range

Laying


1 important

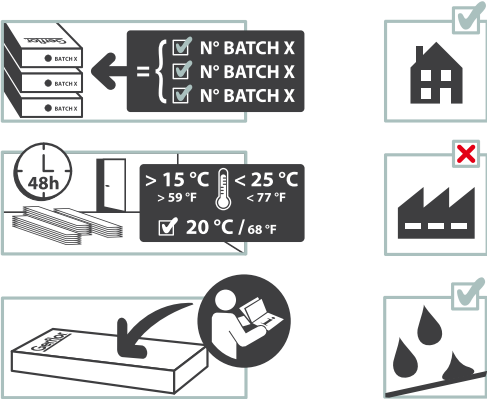


2 preparation

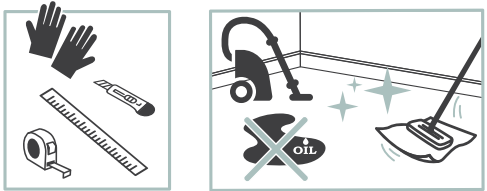

3 installation

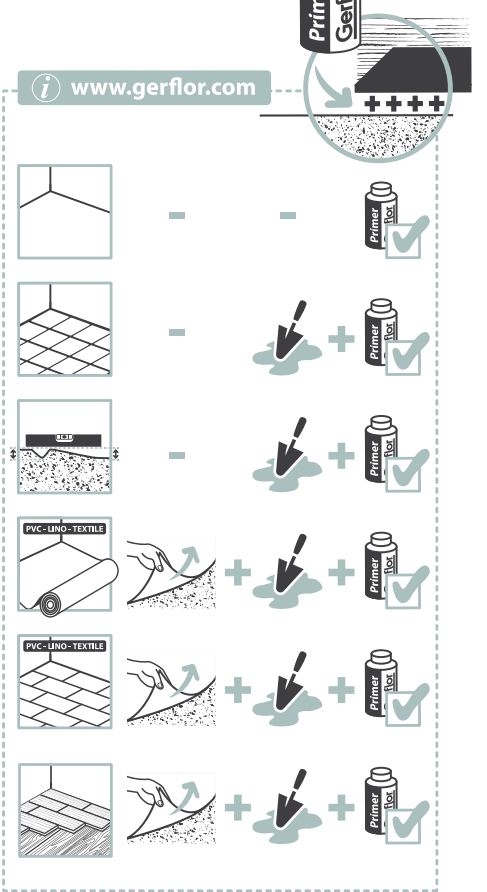

4 maintenance

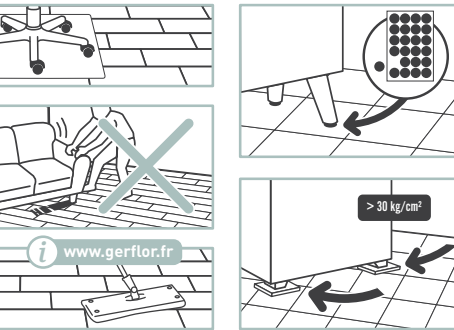

SENSO SELF-ADHESIVE PREMIUM



LVT Tiles
Self adhesive

See index page 68

Cleaning - see page 67



SENSO SELF-ADHESIVE

**Installed quickly
& easily!**



Ultra-Realistic
4 bevelled edges
Textured surface



Trendy
3 styles that reflect consumers taste



Quick & Easy Installation
No glue, no joints, no spacers
Can be cut with a utility knife
Dust-free
15 m² (160 sq. ft.) per hour



Water Resistant



Guarantee 10 years
Domestic use



Scan and
discover
**INTERIOR
DESIGNER**





1014 - Imperial Pearl

1-Imperial Pearl

AS: Size: 91.4 x 15.2 cm
Code: 3325 1014 - EAN: 3475710602320

2-Pecan

BD: Size: 91.4 x 15.2 cm
Code: 3327 0511 - EAN: 3475710250385

3-White Pecan

AS: Size: 91.4 x 15.2 cm
Code: 3325 0394 - EAN: 3475710304651

4-Kola

AS: Size: 91.4 x 15.2 cm
Code: 3325 0309 - EAN: 3475710247538

5-Muscade

BD: Size: 91.4 x 15.2 cm
Code: 3327 0306 - EAN: 3475710250408

6-Noisette

BD: Size: 91.4 x 15.2 cm
Code: 3327 0311 - EAN: 3475710250392

7-Cleveland Dark

VS: Size: 91.4 x 15.2 cm
Code: 3325 0728 - EAN: 3475710606106



1



2



3



4



5



6



7



0728 - Cleveland Dark

SENSO NATURAL



- 1-Sunny Light**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0996 - EAN: 3475710551550
- 2-Columbia**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0347 - EAN: 3475710391088
- 3-Noyer Naturel**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0018 - EAN: 3475710235238
- 4-Authentic Nature**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0577 - EAN: 3475710602122
- 5-Travertin**
VS: Size: 30.5 × 60.9 cm
Code: 3374 0201 - EAN: 3475710320385
- 6-Night Slate**
VS: Size: 30.5 × 60.9 cm
Code: 3374 0397 - EAN: 3475710319419



0577 - Authentic Nature



5



0201 - Travertin



1

2

3


4



0397 - Night Slate



6





SENSO URBAN



0301 - Ceruse Blanc


1



2

1-Ceruse Blanc
VS: Size: 91.4 × 15.2 cm
Code: 3326 0301 - EAN: 3475710247897

2-Wallstreet Light
Size: 30.5 × 60.9 cm
Code: 3375 0702 - EAN: 3475710391095



LVT Tiles
Self adhesive

Technical Characteristics

			PLANKS	TILES
Description				
Total thickness	EN ISO 24346	mm	2.00	2.00
Thickness of wearlayer	EN ISO 24340	mm	0.20	0.20
Weight: mass per unit area	EN ISO 23997	g/sqm	3920	3425
Size	EN ISO 24342	cm	planks: 91.4 × 15.2	tiles: 30.5 × 60.9
Number of planks / tiles and sqm per box	-	planks / tiles	16 planks / 2.20 sqm	12 tiles / 2.22 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
European classification	EN ISO 10874	class	22	22
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical propensity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9	R9
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.25	≤ 0.25
Residual Indentation	EN ISO 24343-1	mm	0.05	0.05
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Garantee for residential use	-	year	10	10
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+
CE Marking				
CE	EN 14041			

Areas of use: domestic use



HEALTH



TVOC < 100 µg/m³ after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT


- ISO 14001
- Soapy water cleaning




Scan and discover
The complete range

Laying


1 important

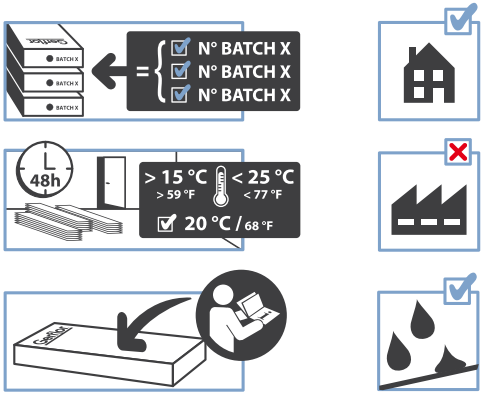


2 preparation

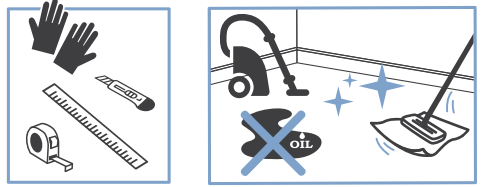


3 installation

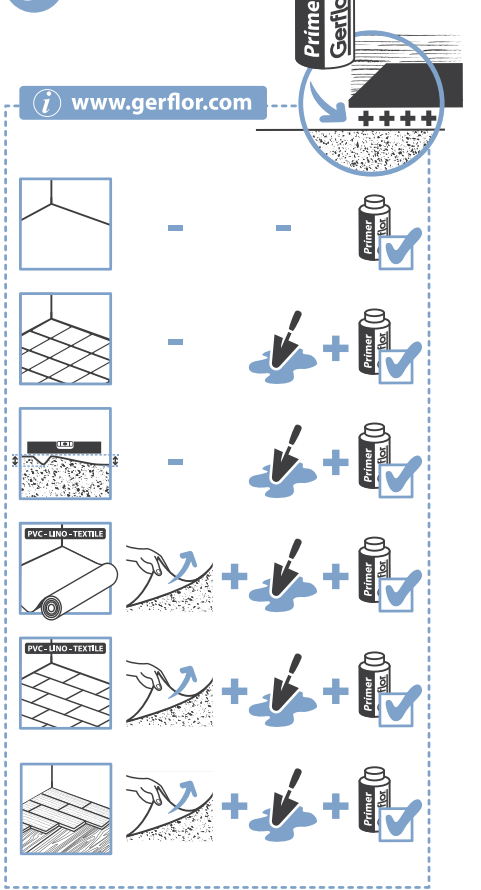

4 maintenance

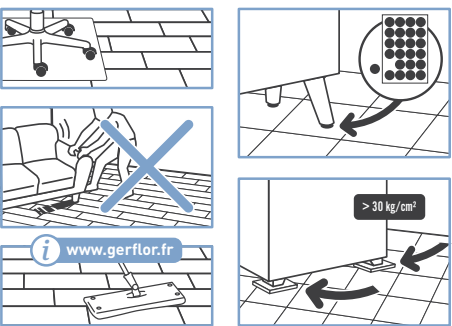

SENSO SELF-ADHESIVE



LVT Tiles
Self adhesive

Cleaning - see page 67

See index page 68

Vinyl tiles

SELF-ADHESIVES



Decorative

2 styles that reflect consumer tastes



Eco-Friendly

Garanteed lead-free
and formaldehyde-free



Compact

Exclusive underlayer for
long-lasting stability



DESIGN




PRIME



Scan and
discover
INTERIOR
DESIGNER

0135 - Marble Beige

Design

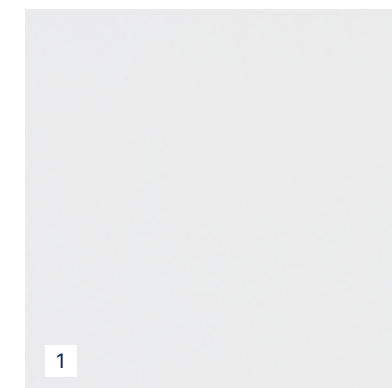

1-White Tile

Size: 30.5 × 30.5 cm

Code: 3237 0224 - EAN: 3475710186844

2-Slate Anthracite



Size: 30.5 × 30.5 cm

Code: 3237 0220 - EAN: 3475710186820

3-Black Tile

Size: 30.5 × 30.5 cm

Code: 3237 0221 - EAN: 3475710186837

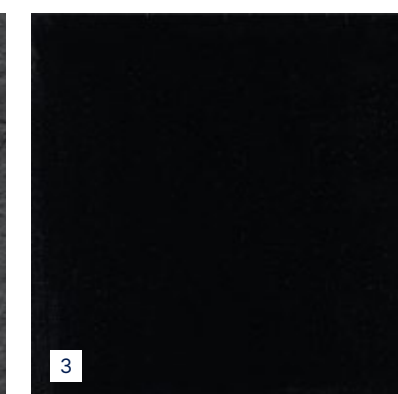

Prime



4-Granite Grey

Size: 30.5 × 30.5 cm

Code: 4556 0130 - EAN: 3475710099380

5-Marble Beige


Size: 30.5 × 30.5 cm

Code: 4556 0135 - EAN: 3475710099410

6-Wood Clear

Size: 30.5 × 30.5 cm

Code: 4556 0139 - EAN: 3475710099434



Technical Characteristics

			DESIGN	PRIME
Description				
Total thickness	EN ISO 24346	mm	1.50	1.30
Thickness of wearlayer	EN ISO 24340	mm	0.08	0.08
Weight: Mass per unit area	EN ISO 23997	g/sqm	2550	2190
Size	EN ISO 24342	cm	tiles: 30.5 × 30.5	tiles: 30.5 × 30.5
Number of planks / tiles and sqm per box	-	tiles	11 tiles / 1 sqm	11 tiles / 1 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
European classification	EN ISO 10874	class	22	22
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical probersity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9 / R10	R9 / R10
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	< 0.40	< 0.40
Residual Indentation	EN ISO 24343-1	mm	0.04	0.04
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Garantee for residential use	-	year	7	3
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+
CE Marking				
CE	EN 14041			

Areas of use: domestic use

Composition 100 % REACH Phthalate free

HEALTH

TVOC < 100 µg/m³ after 28 days

- Formaldehyde-free
- Lead-free, no heavy metals
- Solvent-free
- No harmful plasticizer
- Low VOC emission

ENVIRONMENT

- ISO 14001
- Soapy water cleaning

DESIGN

PRIME

Scan and discover The complete range

Laying

Installation by subfloor type

SMOOTH
Smooth cement that is clean and dry, seamless tiles, liquid screed = can be installed directly

UNEVEN
Cement, floorboards, tiles

- Securing of loose/exposed parts
- Resurfacing required (wood fibres)
- Sanding

SOFT and LOOSE LAY

Carpet, vinyl, linoleum, laminate

- Removal of old subfloor and underlayer
- Resurfacing
- Sanding

IMPOSSIBLE CASES

Heated floor if > 28°C and/or reversible, oriented strand board (OSB), verandas, cracked floors, humidity buildup

TIP

For better adherence, apply Gerflor primer after the subfloor has been sanded, cleaned and vacuumed, before installing the tiles or planks

STEP-BY-STEP

- 1- You will need a utility knife, ruler and tape measure
- 2- Start at the centre of the piece
- 3- Follow the instructions on the back
- 4- Remove protective covering
- 5- Position the piece and press down

TO REPLACE A TILE OR PLANK

- With a utility knife, pierce the tile or plank several times
- Heat it with a blow dryer to soften it
- Remove and replace it

See index page 68

How to care For your Gerflor floor

SAFETY TIPS

- Use plastic coasters or felt pads under the feet of furniture and other heavy objects.
- Protect from sources of heat and spills.

CLEANING

Regular cleaning: use a vacuum and a damp mop with a standard, no-rinse detergent solution.
Gerflor recommends using its Power Cleaner for routine cleaning.

Deep cleaning (every 6-12 months): to make your floor shine like new again, use a restorative product.
Gerflor recommends using its Renovator Polish to protect and enhance the look of your floor.
It leaves a matte finish and brightens up colours.

Stubborn stains: use diluted bleach, white spirit, alcohol or lemon juice.

- Stains such as tomato sauce, mustard, beet juice, blood, ink and iodine: use diluted bleach, allowing it to sit for several minutes and then rinsing thoroughly.
- Rust stains: clean with fabric rust remover and rinse thoroughly.
- Marker, pen, grease and glue stains: rub gently with a cloth moistened with white spirit, and rinse thoroughly.

Products to avoid: acetone, chlorinated solvents such as trichlorethylene, wax, glaze.



LVT Numerical Index

Color Code	Design Color	Type	Size mm	Range	Page
60530828	Authentic Nature	Planks	1239 x 212	SENSO PREMIUM CLIC	20
61151517	Chalki Natural	Tiles	490 x 980	SENSO PREMIUM CLIC	25
61151518	Chalki Verde	Tiles	490 x 980	SENSO PREMIUM CLIC	25
60530728	Cleveland Dark	Planks	1239 x 212	SENSO PREMIUM CLIC	20
60530837	Columbia	Planks	1239 x 212	SENSO PREMIUM CLIC	20
60530953	Columbia Taupe	Planks	1239 x 212	SENSO PREMIUM CLIC	20
60521509	Fjord Light Oak	Planks	1461 x 240	SENSO PREMIUM CLIC	22
60521508	Fjord Oak Golden	Planks	1461 x 240	SENSO PREMIUM CLIC	22
60530309	Kola	Planks	1239 x 212	SENSO PREMIUM CLIC	18
60531505	Meadow Light Greige	Planks	1239 x 212	SENSO PREMIUM CLIC	18
60531507	Meadow Spring Honey	Planks	1239 x 212	SENSO PREMIUM CLIC	18
60531506	Meadow Taupe	Planks	1239 x 212	SENSO PREMIUM CLIC	18
61151516	Neo Marble	Tiles	490 x 980	SENSO PREMIUM CLIC	24
60531503	Noce Brown	Planks	1239 x 212	SENSO PREMIUM CLIC	20
60531504	Noce Taupe	Planks	1239 x 212	SENSO PREMIUM CLIC	20
60530511	Pecan	Planks	1239 x 212	SENSO PREMIUM CLIC	18
61150890	Pepper Light	Tiles	490 x 980	SENSO PREMIUM CLIC	23
61150889	Pepper Taupe	Tiles	490 x 980	SENSO PREMIUM CLIC	23
60530286	Sunny White	Planks	1239 x 212	SENSO PREMIUM CLIC	18
60970954	Columbia Pearl	Planks	1239 x 212	SENSO CLIC	30
60980938	Gotha Clear	Planks	729 x 389	SENSO CLIC	33
60970955	Lord Honey	Planks	1239 x 212	SENSO CLIC	31
60970511	Pecan	Planks	1239 x 212	SENSO CLIC	30
60971300	Pecan Light	Planks	1239 x 212	SENSO CLIC	30
60970950	Pecan Nature	Planks	1239 x 212	SENSO CLIC	30
60980889	Pepper Taupe	Tiles	729 x 389	SENSO CLIC	33
60981510	Pietra Beige	Planks	729 x 389	SENSO CLIC	33
60971514	Scandinav Dark	Planks	1239 x 212	SENSO CLIC	31
60971513	Scandinav Honey	Planks	1239 x 212	SENSO CLIC	31
60971515	Scandinav Light	Planks	1239 x 212	SENSO CLIC	31
60971512	Scandinav Medium	Planks	1239 x 212	SENSO CLIC	31
60981297	Shale Black	Planks	729 x 389	SENSO CLIC	33
60971028	Simba Nature	Planks	1239 x 212	SENSO CLIC	30
60981511	Travertin Ivory	Planks	729 x 389	SENSO CLIC	33
36671119	Brickell Dark	Tiles	298 x 602	SENSO 20 LOCK	38
36671099	Brickell Gey	Tiles	298 x 602	SENSO 20 LOCK	38
36681093	Cashew Clear	Planks	177 x 1210	SENSO 20 LOCK	39
36681091	Dew Beige	Planks	177 x 1210	SENSO 20 LOCK	39
36681096	Lumber Fauve	Planks	177 x 1210	SENSO 20 LOCK	39
36681097	Lumber Grey	Planks	177 x 1210	SENSO 20 LOCK	39
36681095	Lumber Taupe	Planks	177 x 1210	SENSO 20 LOCK	39
36671090	Tuscan	Tiles	298 x 602	SENSO 20 LOCK	38
36181034	Cordoba Black	Tiles	610 x 610	SENSO PREMIUM EASY	45
36181033	Cordoba Ivory	Tiles	610 x 610	SENSO PREMIUM EASY	45
36160780	Flagstone Dark	Tiles	305 x 610	SENSO PREMIUM EASY	45
36160938	Gotha Clear	Tiles	305 x 610	SENSO PREMIUM EASY	45
36170035	Hella White	Planks	184 x 1219	SENSO PREMIUM EASY	44
36171027	Lord Light	Planks	184 x 1219	SENSO PREMIUM EASY	44
36180917	Provence Blue	Tiles	610 x 610	SENSO PREMIUM EASY	45
36181032	Provence Ivory	Tiles	610 x 610	SENSO PREMIUM EASY	45
36170385	Puzzle	Planks	184 x 1219	SENSO PREMIUM EASY	44
36170506	Rosebud Pearl	Planks	184 x 1219	SENSO PREMIUM EASY	44
36170888	Symba Grey	Planks	184 x 1219	SENSO PREMIUM EASY	44
36160702	Wallstreet Light	Tiles	305 x 610	SENSO PREMIUM EASY	45
35791302	Alta Clear	Planks	1219 x 184	SENSO SELF ADHESIVE PREMIUM	50
35791303	Alta Skin	Planks	1219 x 184	SENSO SELF ADHESIVE PREMIUM	50
35790910	Balade Grey	Planks	1219 x 184	SENSO SELF ADHESIVE PREMIUM	50
35790909	Balade Honey	Planks	1219 x 184	SENSO SELF ADHESIVE PREMIUM	50
35790912	Balade Light	Planks	1219 x 184	SENSO SELF ADHESIVE PREMIUM	50
35781034	Cordoba Black	Tiles	610 x 610	SENSO SELF ADHESIVE PREMIUM	51
35781033	Cordoba Ivory	Tiles	610 x 610	SENSO SELF ADHESIVE PREMIUM	51
35780890	Pepper Light	Tiles	610 x 610	SENSO SELF ADHESIVE PREMIUM	51
35780889	Pepper Taupe	Tiles	610 x 610	SENSO SELF ADHESIVE PREMIUM	51
35780920	Provence Gold	Tiles	610 x 610	SENSO SELF ADHESIVE PREMIUM	51
35780919	Provence Grey	Tiles	610 x 610	SENSO SELF ADHESIVE PREMIUM	51
35790287	Simba	Planks	1219 x 184	SENSO SELF ADHESIVE PREMIUM	50
33250728	Cleveland Dark	Planks	914 x 152	SENSO RUSTIC	57
33251014	Imperial Pearl	Planks	914 x 152	SENSO RUSTIC	56
33250309	Kola	Planks	914 x 152	SENSO RUSTIC	57
33270306	Muscade	Planks	914 x 152	SENSO RUSTIC	57
33270311	Noisette	Planks	914 x 152	SENSO RUSTIC	57
33270511	Pecan	Planks	914 x 152	SENSO RUSTIC	57
33250394	White Pecan	Planks	914 x 152	SENSO RUSTIC	57
32800577	Authentic Nature	Planks	914 x 152	SENSO NATURAL	58
32800347	Columbia	Planks	914 x 152	SENSO NATURAL	58
33740397	Night Slate	Tiles	609 x 305	SENSO NATURAL	59
32800018	Noyer Naturel	Planks	914 x 152	SENSO NATURAL	58
32800996	Sunny Light	Planks	914 x 152	SENSO NATURAL	58
33740201	Travertin	Tiles	609 x 305	SENSO NATURAL	59
33260301	Ceruse Blanc	Planks	914 x 152	SENSO URBAN	61
33750702	Wallstreet Light	Tiles	609 x 305	SENSO URBAN	61
32370221	Black Tile	Tiles	305 x 305	DESIGN	65
32370220	Slate Anthracite	Tiles	305 x 305	DESIGN	65
32370224	White Tile	Tiles	305 x 305	DESIGN	65
45560130	Granite Grey	Tiles	305 x 305	PRIME	65
45560135	Marble Beige	Tiles	305 x 305	PRIME	65
45560139	Wood Clear	Tiles	305 x 305	PRIME	65

Communication Tools



Notes

[illegible][illegible]

ASIA: Gerflor Asia

Tel: +852 9222 6355 - Fax: +852 3006 1449

e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd

Australia Tel: +61 1 800 060 785

New Zealand Tel: + 64 0 800 630 119

e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH

Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218

e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux

Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14

e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International

Tel: +1 438 333 0752 - Fax: +1 438 380 5425

e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998

e-mail: gerflorchina@gerflor.com

CZECH REPUBLIC & SLOVAKIA: Gerflor CZ s.r.o.

Tel: +420 725 815 902

FINLAND: Gerflor Oy

Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152

e-mail: info@gerflor.fi

FRANCE: Gerflor

Tel: 00 33 4 75 50 68 68 - Fax: 00 33 4 75 50 69 95

e-mail: serviceconso@gerflor.com

GERMANY: Gerflor Mipolam GmbH

Tel: +49 (0)22 41-25 30-0

e-mail: gerflormipolam@gerflor.com

IRELAND: Gerflor Ltd

Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759

e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.

Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84

e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina

Tel: +55 11 38 48 20 20

e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East

Tel: +966 3 847 1779 - Fax: +966 3 847 1781

e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux

Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89

e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o

Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33

e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA

Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44

e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao

Tel./Fax: + 7 495 785 23 71

e-mail: gerflorrussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.

Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80

e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA

Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85

e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd

Sample service: Contractuk@gerflor.com

Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor USA

Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753

e-mail: info@gerflorusa.com



we care / we act

Our Commitments for a Sustainable future


CARBON FOOTPRINT*

-20 % kg
CO₂ equivalent/m²
between 2020 and 2025


BIOSOURCED CONTENT**

10 % by 2025


RECYCLED CONTENT

30 % by 2025


ADHESIVE FREE***

35 % by 2025


ANNUAL VOLUME RECYCLED

60 000 t by 2025

Gerflor®

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution